


AH-0633

Mechanical Rate of Rise Heat Detector

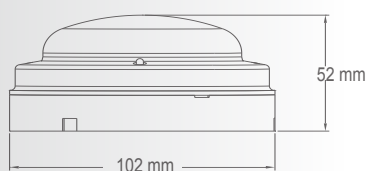

Characteristics

- The standard detector is 2-wire or 3-wire. For 4-wire type just add one relay output module. Simple and easy module placement enables wider application and flexible stock control.
- Detector is made of high endurance, solid and colorfast Fire-proof plastic.
- Non-loosening screws on base terminal for easy installation.
- Dual LEDs for 360-degree visibility.

Specification

| Model | AH-0633-2 | AH-0633-3 | AH-0633-4 |
|----------------------------|-----------------------|-----------|-------------------------------|
| Alarm Contact | N/A | N/A | 0.8A @30V DC 0.4A @125V AC |
| Voltage Range | 12 ~ 30V DC | | |
| Alarm Current @24V DC 470Ω | 40mA | 40mA | 45mA |
| Alarm Temperature | Comply to EN54 | | |
| Ambient Temperature | 0°C ~ +55°C | | |
| Material | Fire-proof plastic | | |
| Dimensions | 102mm(Dia.) x 52mm(H) | | |
| Weight | 140g | 140g | 155g |
| Color | White | | |

Effective alert area

| Construction/Height | Under 4M | 4M ~ 8M |
|---------------------|-------------------|-------------------|
| Fire-proof Building | 90 M ² | 45 M ² |
| Ordinary Building | 50 M ² | 30 M ² |

Order information

| | |
|-----------|-------------------------------------|
| AH-0633-2 | 2-wire |
| AH-0633-3 | 3-wire with remote indicator output |
| AH-0633-4 | 4-wire with relay output |

Approvals: 