TX7930

Handheld Programmer

Features and Benefits

- Write, read and erase device parameters
- Pluggable cable with end alligator clip to hold tight the terminals
- LCD display and functional keys
- Low current consumption for longer battery lifespan
- Circuit protection against clip
- Auto power-off within 5 minutes

Overview

The TX7930 is the general purpose programming tool use for TX7000 family products. This unit is designed to suit for entering device parameters such as address, sensitivity, mode and types to meet the site situation and environmental requirements. In addition, the programmer is capable to read the previous encoded parameters to use for testing application and troubleshooting purposes.

The TX7930 is miniature and robust design makes it convenient to bring in the work place. The programmer is packed with twin 1.5V AA battery and cable, ready for usage once received. Easy to understand the display and with functional keys allow easy single-button activation of the common used parameters.

Technical Specification

Battery Required	2X1.5 AA / Included
Current Consumption	Standby 0μA, In-use: 3mA
Protocol	T&A
Material / Colour	ABS / Grey Glossy finishing
Dimension / LWH	130 mm x 54 mm x28 mm
Humidity	0 to 95% Relative Humidity, Non condensing

Names and Location

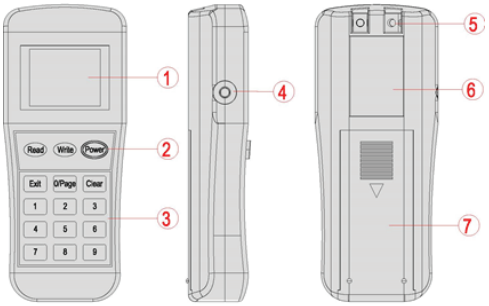

Data Display	16 Characters, four-segment display shows the device address, set types and mode and ID value
Function Key	Allow easy single-button activation of the common used parameters such as exit, clear, page, read and write function
Numerical Key	0 to 9 keys used to enter numeric values
Jack Socket	Location for male connector of programming cable
Loop Terminal	Connection to signaling loop used for testing the loop wiring
Label	Programmer details and specification
Battery Compartment	Location for programmer batteries